


Oil insulation
test in 60, 75
and 80 kV
models



Touch Screen
HMI

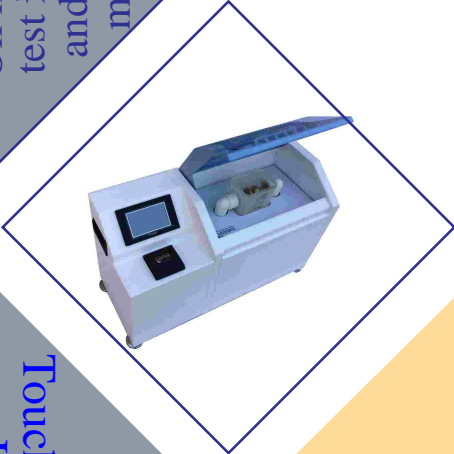

Ability to
test under
different standards

18
month warranty and
15
year after-sales service

Including an
Internal Inverter

Internal
Memory & Printer

Smarterco Oil Tester - OTH80

Technical data

Power supply	200 v ... 240 v(47 Hz ... 63 Hz)
Output voltage	0...80 Kv
Voltage slew rate	0.5 ... 3 KV/S
Display	HMI wecon 4.3"
Accuracy	0...80 kv 2 kv
Resolution	0.01 KV
Pre-programmed standard	Single Manual(4 cycle) Standard (IEC 156/95 – ASTM D 877 /87–JIS c2101/78 - IRAM 2341/72)
Printer	Thermal ,203 DPI , 57 mm normal paper
Operating temperature	0...+40°C
Dimensions(W * H * D)	62 * 39 * 25 cm
Degree protection	IP 31
Weight without options	34 kg
Interface(option)	Usb2.0
Internal measurement of the oil sample temperature (option)	0...99°C



Oil insulation test in 60, 75 and 80 kV models



Touch Screen HMI



Ability to test under different standards



Including an Internal Inverter

Internal Memory & Printer

Smarterco Oil Tester - OTH80

