




Fiber Optics vis-NIR Spectrophotometer for Transmission and Reflection measurements

Model: VS-TR

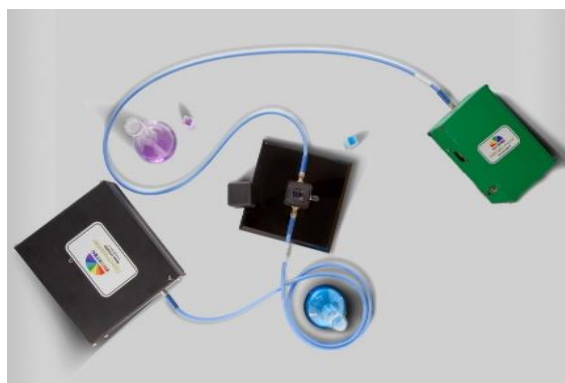

UVS-TR system include:

Item	Description	Number	Price (Rial)
1	vis-NIR spectrometer (300-1100 nm)	1	337,500,000
2	Halogen-Tungsten Light Source (300-2500 nm)	1	23,000,000
3	2-side Cuvette Holder with quartz lenses	1	19,670,000
4	Armored, 600um core, Solarization Resistant fiber optic cable	2	50,000,000
5	Reflectance Probe for UV & Visible; 7 400µm around 1 600µm	1	125,000,000
6	White Reflectance Standard	1	50,530,000

Features:

- Absorbance, Transmittance and Reflectance Spectrometer
- UV-Vis-NIR Detection Wavelength Range from 300-1100 nm (Custom design with 660 nm spectral range)
- Detachable optics assembly suitable for portable process, and lab applications
- From 1 µs to 4 seconds CCD Integration time

- UV-Enhanced Coated Detector
- Aberration- Corrected Concave Holographic Grating
- High speed USB-2 interface
- Ruggedized Aluminum Enclosure
- Fiber Optics cables with SMA 905 input fiber connectors for interfacing with other equipment such as light sources and sample holders.

Simultaneous Spectrophotometer and Colorimeter

VS-TR can be used as vis-NIR spectrophotometer to measure transmission and absorbance of liquids and transparent materials as well as a vis-NIR spectrophotometer to measure reflectance at 0-degree geometry of opaque materials. In addition, **VS-TR** can be used as a colorimeter to determine the CIE (L*, a*, b*) and XYZ parameters of colors in the visible range.

It's a modular spectrometer that can acquire a full spectrum in less than 1 millisecond with 0.25 nm steps.

Applications:

- **Material science**
 - **Life Science**
 - **Food Science**
 - **Earth Science**
 - **Painting**
- and more...

UVS-spec® software

- Free real-time operating software
- Compatible with Windows 10
- Dark-level correction
- Thermal Smoothing
- Finding Peaks

- CIE measurements
- Real-time variation measurements
- Calculating ratio of two wavelengths intensities

Specifications	
Operating Mode	Transmittance, Absorbance and Reflection
Wavelength Range	300-1100 nm custom products (spectral range: 660nm)
Wavelength steps	0.25 nm
Resolution	0.7 nm
Wavelength Reproducibility	± 0.1 nm
Detector	UV-enhanced CCD 3648 Pixels
Light Source	Halogen-Tungsten
Stray Light	< 0.2 %T
Photometric Measuring Range	0-3 Abs
User Interface Language	English
Interface	USB2
Power	220 V AC
Dimensions (H x W x D)	155mm×140mm×65mm
Weight	< 2 kg
Data saving	EXCEL, PTS

Contact us:

No.002, Rouyesh Bld., Niroom Research Institute, At The End of Shahid Dadman Blvd.,
Shahrak Ghods, TEHRAN, IRAN

www.phystec.ir

Telefax: +98-2188364614

info@phystec.ir