


i4 سری PLC

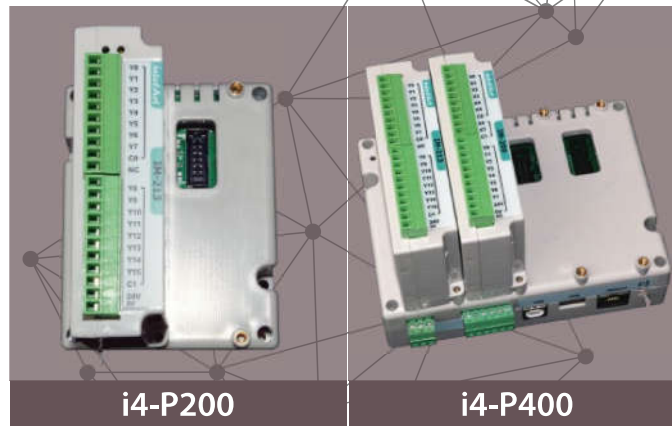

i4-P200

i4-P400

Performance		
Processor	Arm Cortex M4	
Memory		
Application Memory	256 KB	
Data Memory	256 KB	
Retain Memory	4 KB	
Settings Memory	16 KB	
Interfaces		
Ports	Isolated RS-485 / CAN USB Device	Isolated RS-485 / CAN Ethernet USB Host / USB Device
Programming Ports	USB	USB / Ethernet
SD Card	-	Up to 32 GB
I/O Expansion		
Supported iM Series	2	4
Max Digital I/O Count	32	64
I/O Scan Frequency	1000 Hz	
Isolated Power		
Voltage Range	18 - 30 V	
Current Range	< 100 mA	
Dimensions		
Installation Dimensions	82 x 103 x 26 mm	141 x 103 x 37 mm
Ambient Conditions		
Storage Temperature	-15 to +75 °C	
Operating Temperature	-10 to +60 °C	
Other Specifications		
Technologies	RealTime OS	
Network	Web Server / TFTP	
Engineering Software	Intelart Studio	

