



RAXON100LPB is an industrial X-ray source for producing a beam of high intensity X-rays with small focal spot and high stability which ensures uniform beam intensities and dose rate throughout its fan/cone-shaped beam. Stable voltage and electrical power applied to X-ray tube guarantees stable dose exposure and high-quality images in digital radiography applications.

Applications

Industrial Radiography
Non-Destructive Testing
Food Inspection
Security Inspection
Densitometry and Thickness Measurement

Specifications

X-ray Characteristics

Tube Type

Stationary anode, Glass tube, Tungsten target

Focal Spot

0.5 mm (IEC 336)

Beam Filter

2 mm thick 6061 Al, ± 0.01

Beam Geometry

Symmetrical fan up to $40^\circ \times 30^\circ$, cone up to 35°

Input Voltage

220 ± 10 Vac, 50/60Hz, 1A maximum

X-ray Tube Voltage

Nominal X-ray tube voltage is adjustable between 60kV to 100kV.

X-ray Tube Current

0.1 - 1.2 mA over specified tube voltage range

X-ray Tube Power

200W, continuous mode (can be increased on customer's demand)

Voltage Regulation

Line: $\pm 0.1\%$ for a $\pm 10\%$ input line change of nominal input line voltage

Load: $\pm 0.1\%$ for a 0.1mA to 1.2mA load change

Voltage Accuracy

Voltage measured across the X-ray tube is within $\pm 2\%$ of the programmed value

Voltage Risetime

Ramp time shall be $< 200\text{ms}$ from 10% to 90% of rated output

Voltage Overshoot

Within 5% of rated voltage in $< 10\text{ms}$

Voltage Ripple

1% pp of rated

Current Regulation

Line: $\pm 0.1\%$ for a $\pm 10\%$ input line change of nominal input line voltage

Load: 0.5% @ 60-100kV, 0.1 - 1.2 mA

Current Accuracy

Current measured through the X-ray tube is within $\pm 2\%$ of the programmed value

Current Risetime

$< 200\text{ms}$ from 10% to 90% of rated output

Arc Intervention

4 arcs in 10 seconds with a 200ms quench = Shutdown



Filament Configuration

Internal high frequency AC filament drive with closed loop filament emission control

Digital Interface

RS-232/USB/Ethernet Interface selectable port

Control Software

A demo GUI for engineering evaluations will be provided for the RS-232/USB/Ethernet digital interface and Encoded Command Port for customized software

Emergency Stop

A physical emergency stop is embedded for prompt shut down in case of emergency independent of software and microcontroller modules

Operating Temperature

0°C to +40°C

Storage Temperature

-40°C to +70°C

Humidity

10% to 95% relative humidity, non-condensing

Motherboard Cooling

Natural convection augmented by customer provided 250cfm cooling fans for continuous operation (Oil cooling circulation, Optional)

Input Power Line Connector

Standard 3pin Line-Null-Earth connector

Dimensions

430mm X 295mm X 295mm

Weight (Approx.)

23 kg

Installation Orientation

Can be mounted in any orientation.

Beam Orientation

Beam divergence angle: 40 x 30

X-ray Leakage


Not to be greater than 1mR/hr at 100cm outside the external surface

Ultra-Low Leakage Dose Option

ULLD option is available on request. For this option, radiation leakage will be less than 0.5mR/hr at 5cm outside the external surface

Accessories

RRS232-/USB Connection cable
Ethernet connection cable
User Manual
Software

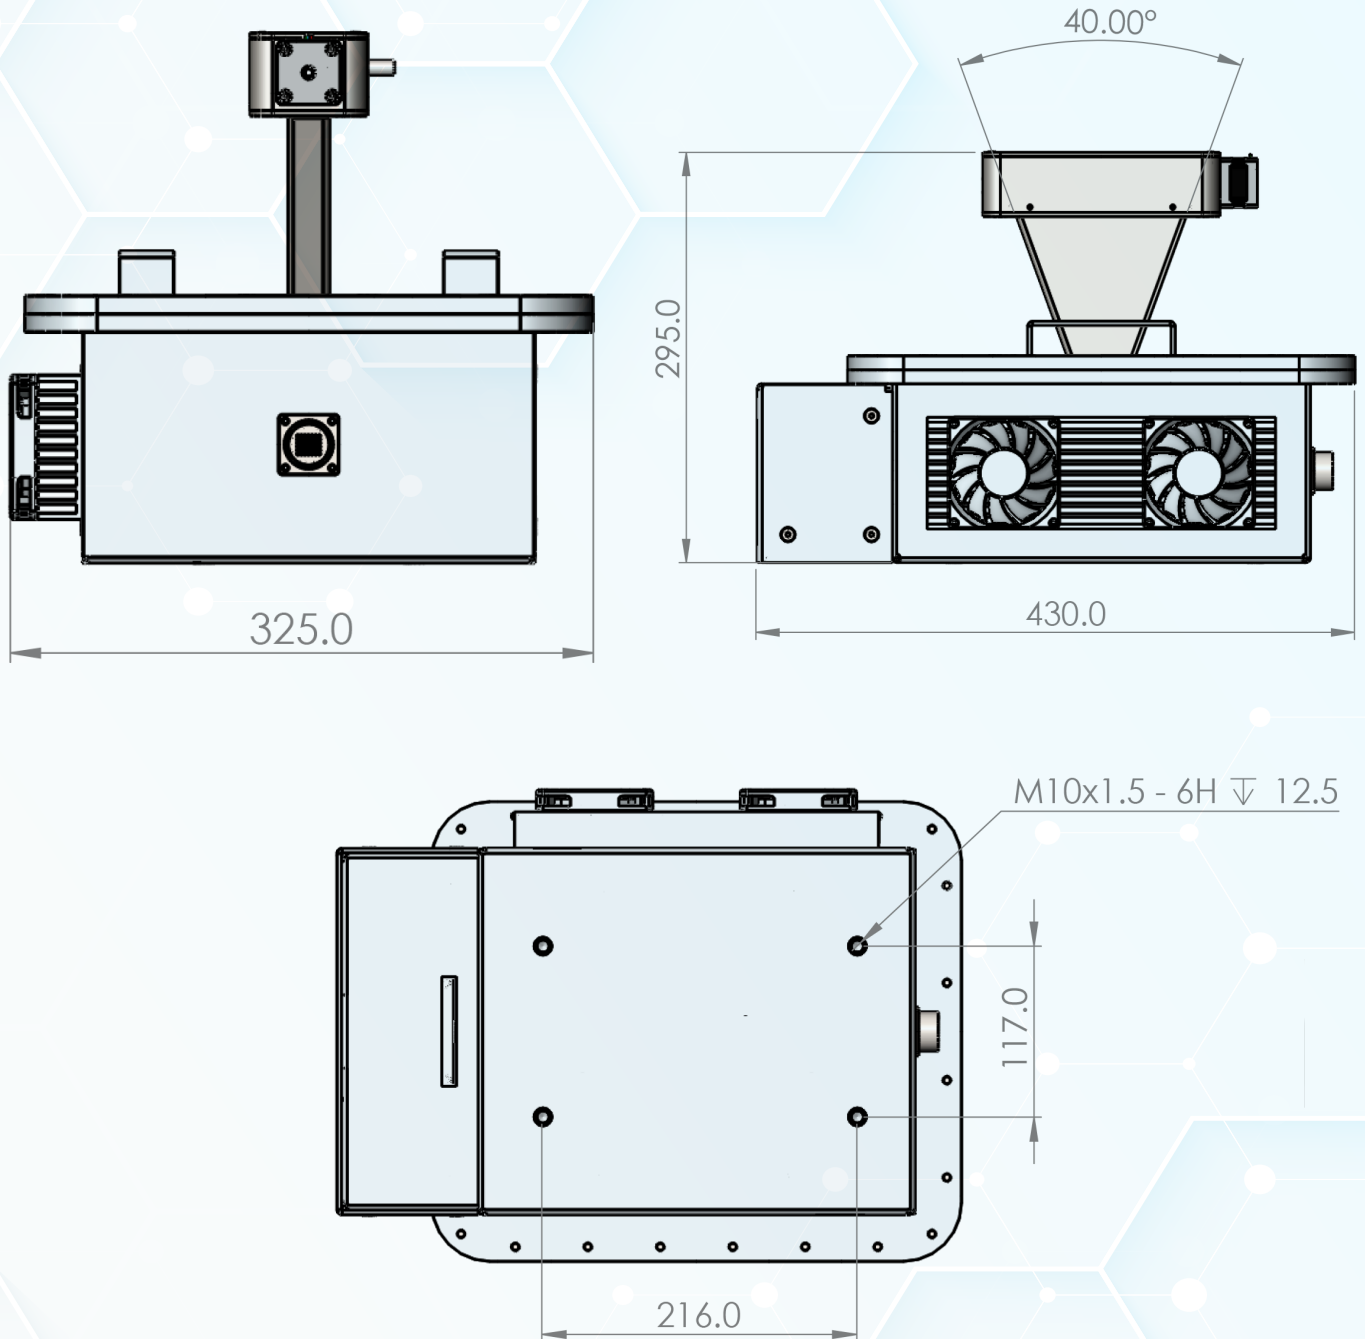

Dimensions are in millimeters