

RAXON200LPB is an industrial X-ray source for producing a beam of high intensity X-rays with small focal spot and high stability which ensures uniform beam intensities and dose rate throughout its fan/cone-shaped beam. Stable voltage and electrical power applied to X-ray tube, guarantees stable dose exposure and high-quality images in digital radiography applications.

Applications

Industrial Radiography
X-ray Imaging
X-ray Irradiation
Non-Destructive Testing
Food Inspection
Security Inspection
Densitometry and Thickness Measurement

Specifications

X-ray Characteristics

Tube Type

Stationary anode, Glass tube, Tungsten target, Be filter

Focal Spot

1.5mm (IEC 336)

Beam Filter

3mm thick 6061 Al, ± 0.01

Beam Geometry

Symmetrical fan up to $63^\circ \times 17^\circ$, cone up to 40°

Input Voltage

$220 \pm 10\%$ Vac, 50/60Hz, 2A maximum

X-ray Tube Voltage

Nominal X-ray tube voltage is adjustable between 80kV to 220kV.

X-ray Tube Current

0.2-2mA over specified tube voltage range

X-ray Tube Power

400W, continuous mode (can be increased on customer's demand)

Voltage Regulation

Line: $\pm 0.1\%$ for a $\pm 10\%$ input line change of nominal input line voltage

Load: $\pm 0.1\%$ for a 0.2mA to 2mA load change

Voltage Accuracy

Voltage measured across the X-ray tube is within $\pm 2\%$ of the programmed value

Voltage Risetime

Ramp time shall be $< 200\text{ms}$ from 10% to 90% of rated output

Voltage Overshoot

Within 5% of rated voltage in $< 10\text{ms}$

Voltage Ripple

1% pp of rated voltage @ $\leq 1\text{kHz}$

Current Regulation

Line: $\pm 0.1\%$ for a $\pm 10\%$ input line change of nominal input line voltage

Load: 0.5% @ 80-220kV, 0.2mA to 2mA

Current Accuracy

Current measured through the X-ray tube is within $\pm 2\%$ of the programmed value

Current Risetime

$< 200\text{ms}$ from 10% to 90% of rated output



Arc Intervention

4 arcs in 10 seconds with a 200ms quench = Shutdown

Filament Configuration

Internal high frequency AC filament drive with closed loop filament emission control

Digital Interface

RS-232/USB/Ethernet Interface selectable port

Control Software

A demo GUI for engineering evaluations will be provided for the RS-232/USB/Ethernet digital interface and Encoded Command Port for customized software

Emergency Stop

A physical emergency stop is embedded for prompt shut down in case of emergency independent of software and microcontroller modules

Operating Temperature

0°C to +40°C

Storage Temperature

-40°C to +70°C

Humidity

10% to 95% relative humidity, non-condensing

Motherboard Cooling

Natural convection augmented by customer provided 250cfm cooling fans for continuous operation (Option: Oil cooling circulation)

Input Power Line Connector

Standard 3pin Line-Null-Earth connector

Dimensions

885mm X 526mm X 340mm

Weight (Approx.)

75 kg

Installation Orientation

Can be mounted in any orientation.

Beam Orientation

Beam divergence angle: 63 X 17

X-ray Leakage

Not to be greater than 1mR/hr at 50cm outside the external surface

Ultra-Low Leakage Dose Option


ULLD option is available on request. For this option, radiation leakage will be less than 0.5mR/hr at 5cm outside the external surface

Accessories

RS-232/USB connection cable
Ethernet connection cable
User Manual
Software

RAXON200LPB

Paya Radiography Technology Co.
X-ray Sources - RAXON Series

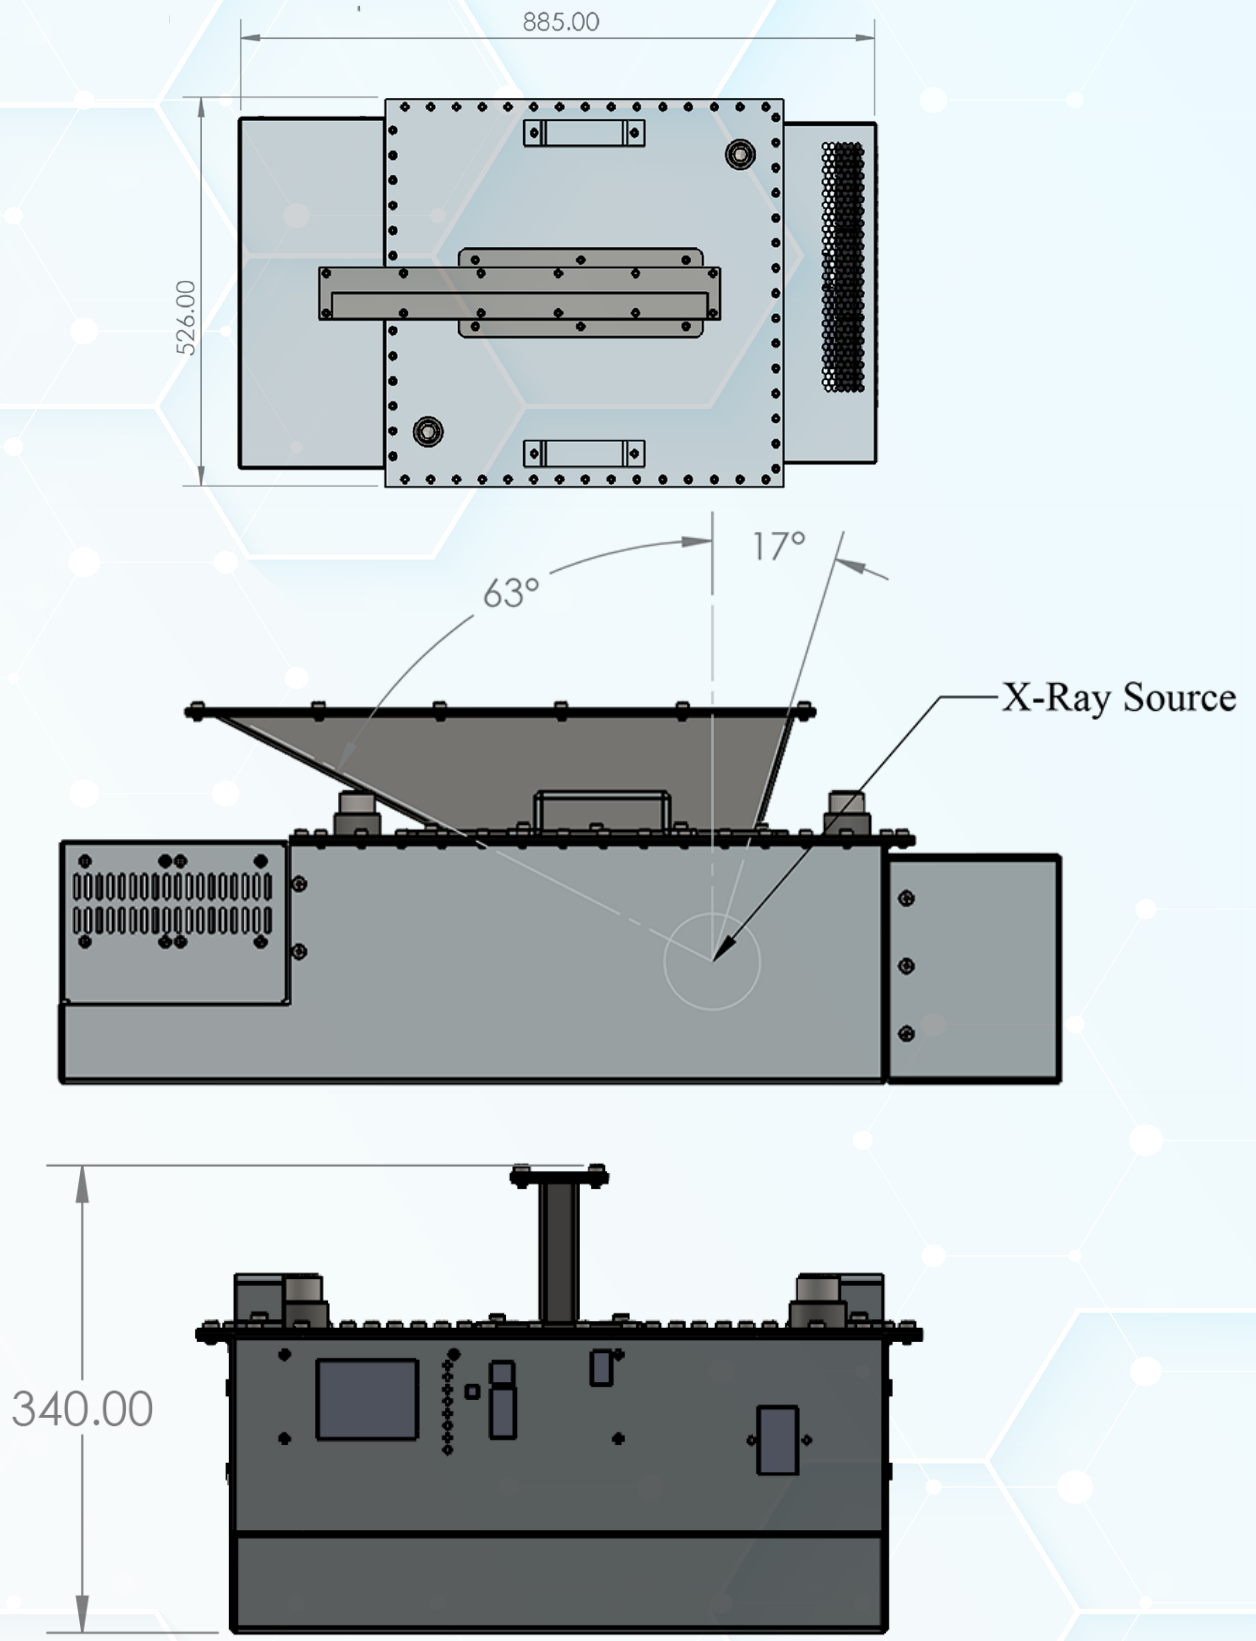

Dimensions are in millimeters