


Syringe Pump

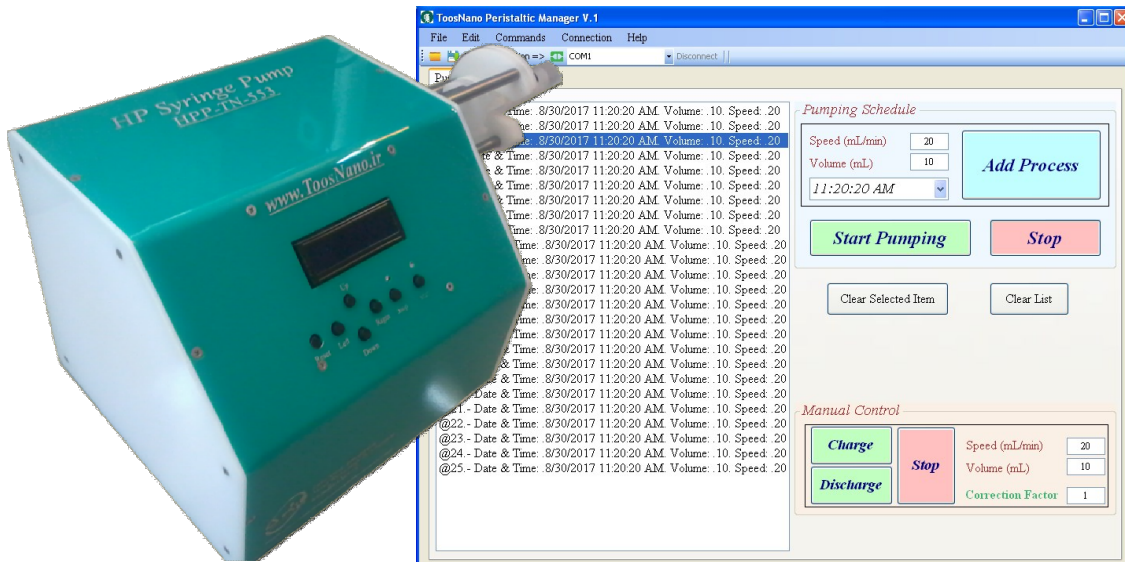

Item	Specification	
SRP-TN-556	Travel Per Microstep	60 nm
	Minimum Speed	12 $\mu\text{m.s}^{-1}$
	Maximum Speed	2 mm.s <sup>-1</sup>
	Maximum Linear Force	400 N
	Travel Per Revolution	4mm
	Steps Per Revolution	400
	Travel Per Step	10 $\mu\text{m}$
	Microsteps Per Step	16
	Power Supply	220V AC 50/60Hz with FuselessResetable Switch
	Protection Class	IP53
	Standard Syringe	5,10, 20, 60mL
	Motor	Stepper/Servo Motors
	Weight	2 kg
	Dimensions	W470 x H210 x D200mm
Power Supply	220V AC 50/60Hz with FuselessResetable Switch	
USB Connection	Yes (Optional)	
ToosNano Syringe Manager Software (WINDOWS Based)	Yes (Optional)	