




2008 

Orbital motion

Its use in everyday applications has already earned this model the motto "Great performance in a small package". A powerful, quiet, space-saving model, versatile, either for gentle movement of liquids or vigorous mixing of the most varying materials.

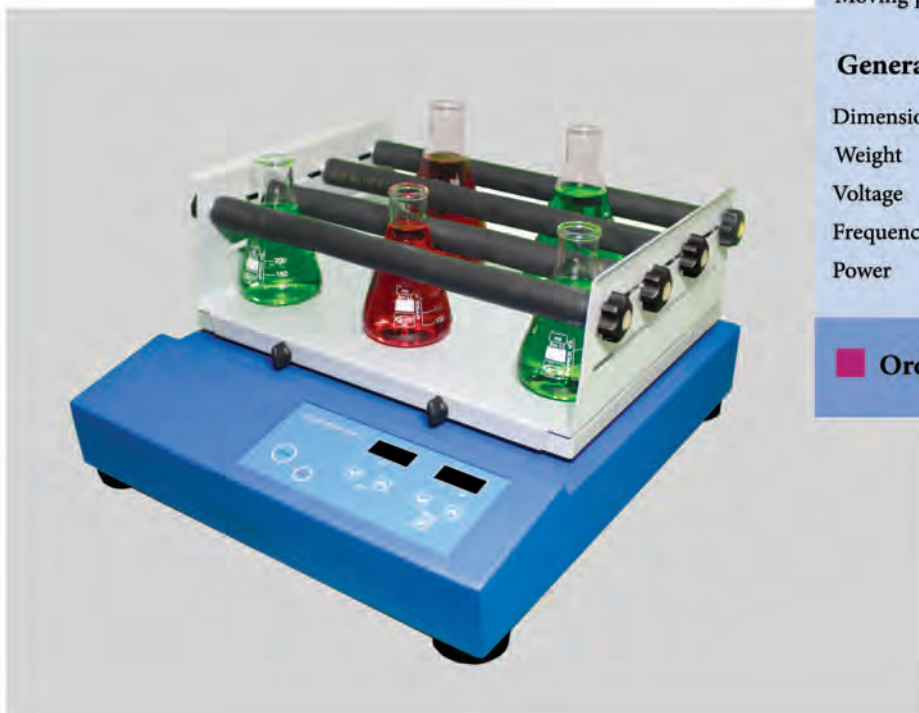


Technical Data

Shaking motion	Orbital
Orbital diameter	10 mm
Max. shaking weight (with attachment)	8 kg
Speed range	20 – 500 rpm
Timer	99:59:00 (endless)
Speed & time display	7 segment
Moving platform	420×340 mm

General data

Dimensions (W×D×H)	450×510×90 mm
Weight	10 kg
Voltage	240 V
Frequency	50/60 Hz
Power	100 W


 Order No. 2008

Features


- ▶ Compact , flat shaker with ideal swivel motion
Drive mechanism , ensuring high
Stability and dependability for continuous operation
Constant speed during continuous
- ▶ Electronic adjustment of speed and timer
Digital display makes it possible to read the speed
and timer function.
Electronic time switching clock: 0 - 99 h 59 min
or continuous operation (endless) .
Electronic speed control, stepless, with gentle start-up
Clearly laid out control panel for easy operation
- ▶ Housing made of high impact
Body color of the electrostatic
Platform of aluminium
Operation, independent of load

Accessories




 Order No. 2001



 Order No. 2002



 Order No. 2003

3008

Reciprocating motion

What sets this robust, space-saving compact Shaker apart from the Shaker is its shaking motion. Its impressive features are both its gentle back-and-forth motion and its intensive shaking of liquids, especially in separating funnels .model, versatile, either for gentle movement of liquids or vigorous mixing.




Technical Data

Shaking movement	reciprocating
Orbital diameter	20 mm
Max. shaking weight (with attachment)	8 kg
Speed range	20 – 300 rpm
Timer	99:59:00 (endless)
Speed & time display	7segment
Moving platform	420×340 mm

General data


Dimensions (W×D×H)	450×510×90 mm
Weight	10 kg
Voltage	240 V
Frequency	50/60 Hz
Power	100 W

 Order No. 3008


Features

- ▶ Compact , flat shaker with ideal swivel motion
Drive mechanism , ensuring high
Stability and dependability for continuous operation
Constant speed during continuous
- ▶ Electronic adjustment of speed and timer
Digital display makes it possible to read the speed
and timer function.
Electronic time switching clock: 0 - 99 h 59 min
or continuous operation (endless) .
Electronic speed control, stepless,with gentle start-up
Clearly laid out control panel for easy operation
- ▶ Housing made of high impact
Body color of the electrostatic
Platform of aluminium
Operation,independent of load




 Order No. 3001




 Order No. 3002



 Order No. 2002



 Order No. 2003