



SAMA MICROPIPETTE PULLER



Wide range of capillaries

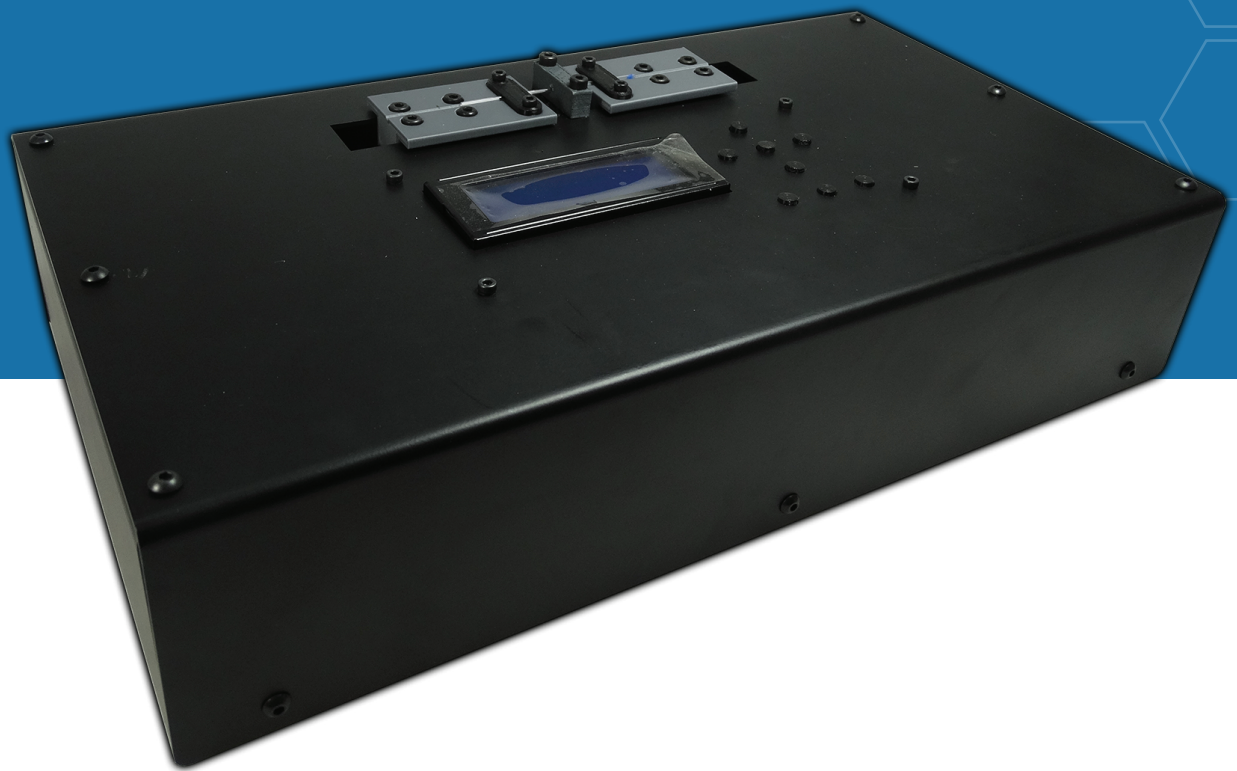


Simple installation




Simple operation



More than 10 default program



Power Supply for safety



Adjustable Heating Element



Cost-effective



Metal body with electrostatic coloring


ADVANTAGES

- Simple and Easy to Use
- Digital Display Shows Status and Setting
- Adjustable Heating Value
- Shows Elapsed Time

SPECIFICATIONS

Accessories included	Glass Capillary, AC Power cord
Working voltage	AC220V, 50/60Hz
Power consumption	Approx. 80W
Heating element	Aluminum Block
Range of capillaries	1 to 1.5 mm OD
Maximum Capillary Length	150 mm
Minimum Capillary Length	55 mm
LCD	LCD charecter display, 20×4
Package Dimension	375×200×90 mm
Net Weight	6.3 kg

Common Applications

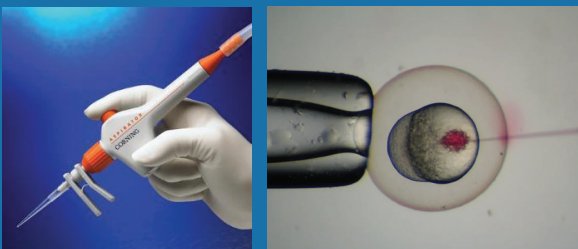

Patch pipettes

Sharp electrodes

Aspiration pipettes

Zebrafish injection

Insect egg injection

Pronuclear injection