







Over 60 compatible syringes (0.5 µl-60 ml)




Power Supply for safety




Broad range of infusion rate



Simple USB connection



Dual Channel Syringe Pump



Military socket with multiple function



Ammundamud .

Large Touch Screen with user-friendly UI



Metal Body with Electrostatic Coloring

Technical Specifications

• Flow rate accuracy: ± 1%

• Number of Channels: 2


• Number of Module Controlling: 4

• Power supply: 220 V

• **Weight:** 5.2 (kg)

• **Dimension:** 250×215×150 mm

Syringe Volume	Inner Diameter (mm)	Flow Rate (nl/min - ml/min)
0.5 μl	0.103	0.00167 - 0.0042
	0.3275	0.01667 - 0.0417
50 μl	1.031	0.1669 - 0.417
100 μl	1.46	0.3348 - 0.837
500 μl	3.26	1.670 - 4.174
1 ml	4.61	3.339 - 8.347
5 ml	10.3	16.667 - 41.667
10 ml	14.57	33.350 - 83.367
25 ml	23.0	83.106 - 207.777
50 ml	32.6	166.959 - 417.399

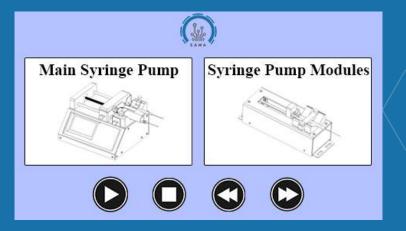

Take Your Pump Function to the Next Level!

Using our Professional Two-Channel Syringe Pump, you can simultaneously control up to 4 syringe pump modules. Hence, you are able to control 6 channels with this device! With the user-friendly UI and large touch and colorful screen, the control of syringe pumps is a piece of cake!